ECOWARM OSB

the High Performance Radiant Board

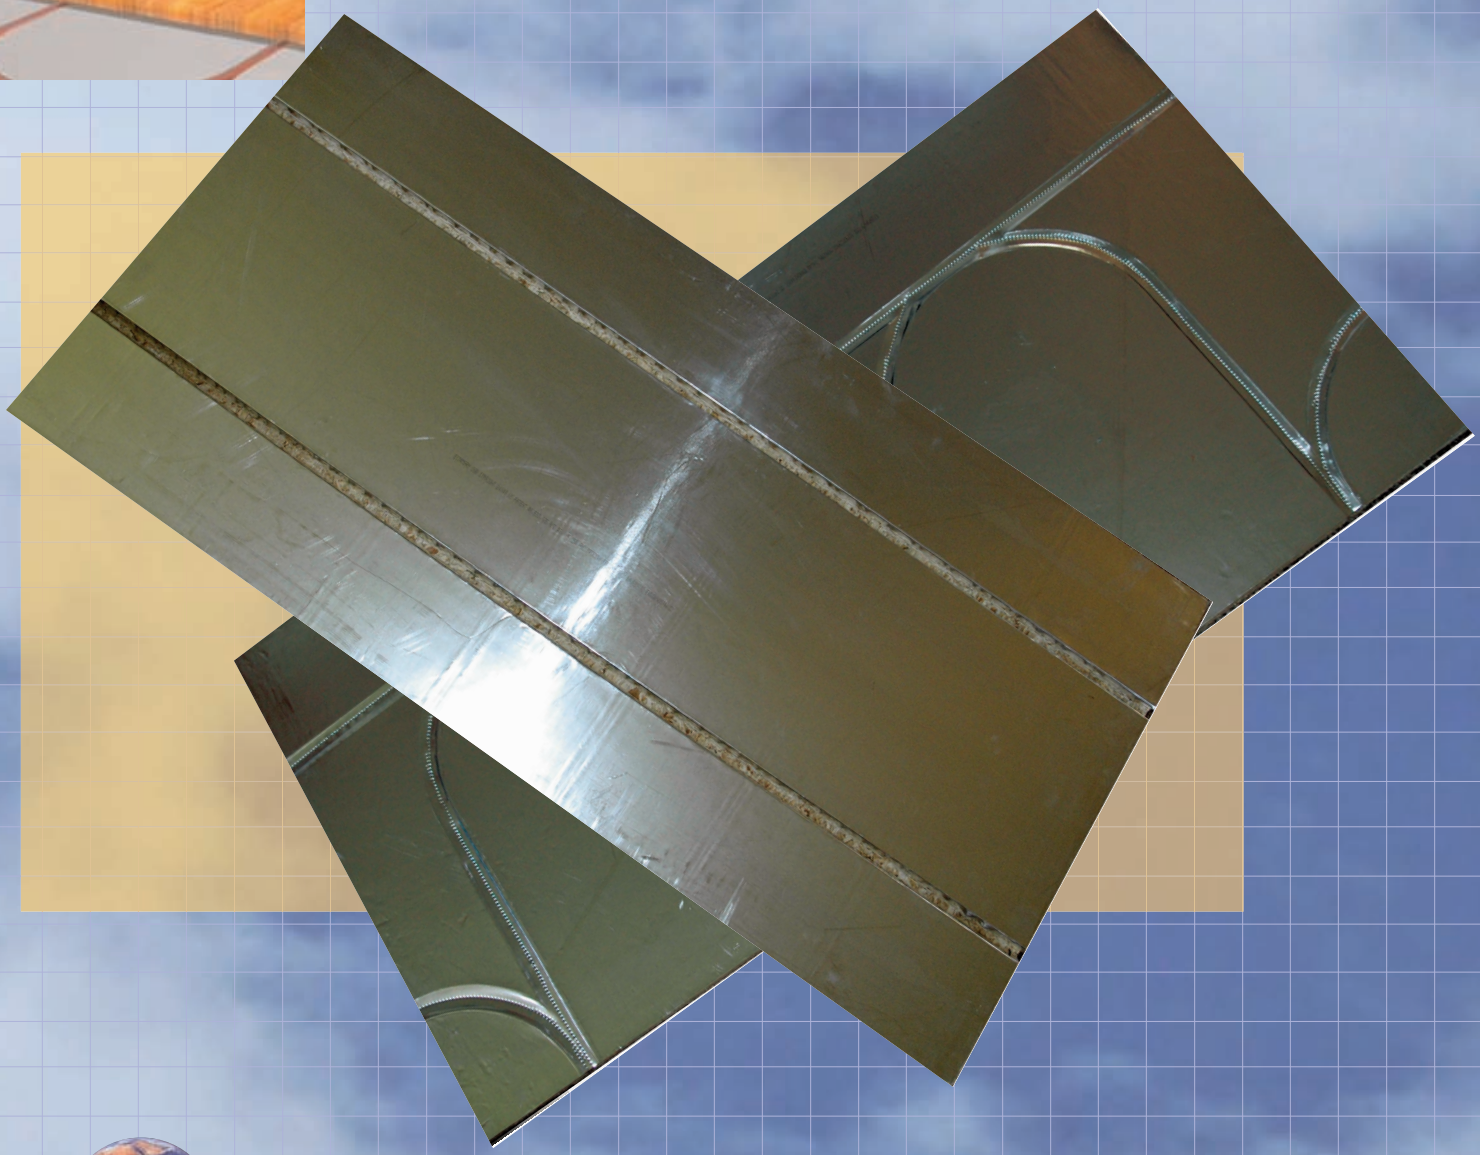



PRODUCT SPECIFICATION

Environmentally friendly radiant floor heating systems

OFFERED BY:

www.ecowarm.us

503-266-1615

U.S. Patent # 6,533,185 and Patents Pending

www.ecowarm.us

ECOWARM OSB PRODUCT INFORMATION:

Ecowarm OSB boards are manufactured from Weyerhaeuser Edge Premium OSB from sustainably managed forests, with an aluminum layer bonded with a water-based low VOC adhesive.

Nominal dimensions: Each board is 23.5” x 47” x 3/4” thick, or 7.68 square feet a board

Weight: Approximately 2.76 lbs. per square foot, 21 lbs. per board

Pallet Size: 4’ x 4’ x42” tall (2 Ecowarm OSB™ boards to a row, 50 rows high)

Approximate Pallet Weight: 2140 lbs. (smaller pallets available by special order)

Approximate Truckload Quantities: Approx 17.000 square feet.

Pallet Appearance: Shrink wrapped, corner protected, color coded corners by part #

Recommended Product Mix: Straight 62%, 38% Supercombo Allow 5%-10% extra for waste.

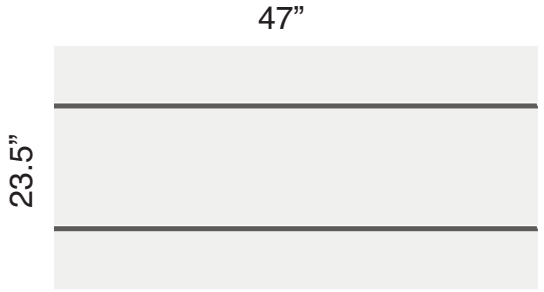

STRAIGHT:

These are used about 62% of the time.



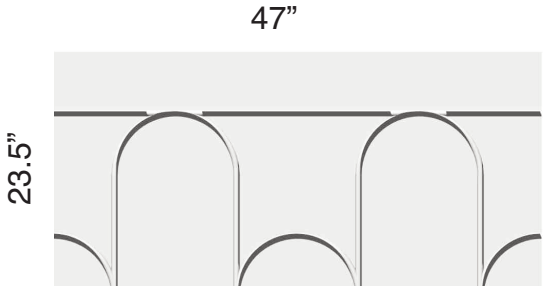

SUPERCOMBO:

These are used when a bypass and or a return is needed, usually about 38% of the time.

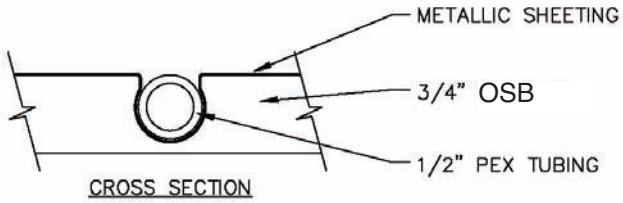

Note On Board Dimensions:

These Boards are cut from 4’x8’ sheets of OSB and are therefore a nominal 2’x4’ dimension since some material is lost in the cutting.

Actual board measurement: 47”x 23.5”

Tubing is spaced 11.750” on center.

One quarter radius turns measure 5.875” from edge.